

RESIDENTIAL ESS SOLUTION

DEYE SPRING RW SERIES



Easy Operation & Maintenance

- Battery module auto networking (No DIP switches)
- Support remotely monitoring and upgrade the firmware via Deye inverter
- Support external power supply activation, prevents battery suspension
- Allow over-discharge direct recharge, easy to maintain.



Safer

- (LFP) Battery : Safe, long-lasting, high-efficiency. Built-in circuit breaker, Intelligent BMS. Eco-friendly materials, non-toxic, pollution-free module.



Flexible Application

- Support Max. 32 units in parallel
- Built-in 10A constant-current limit charge
- Compatible with any brand inverter charge and discharge
- Suited to provide energy for backup power, residential, etc.



Reliable

- Built-in circuit breaker, Support 200A charge and 240A discharge
- Charge from 0℃ to 55℃, discharge from -20℃ to 55℃

≥6000

Cycles

32 units

Max in parallel

70%

EOL

12kW

Maximum Output Power

Wall-Mounted Battery (LV)



Model		RW-F10.6
Main Parameter		
Battery Chemistry		LiFePO ₄
Built-in Circuit Breaker		125A 2P, 60Vdc
Capacity (Ah)		208
Scalability		Max. 32 pcs pack (Max.340kWh) in parallel
Nominal Voltage (V)		51.2
Operating Voltage (V)		44.8 ~ 57.6
Nominal Energy (kWh)		10.64
Usable Energy (kWh) ^[1]		9.58
Charge / Discharge Current (A) ^[2]	Recommend	Charge : 104 / Discharge : 104
	Max.	Charge : 200 / Discharge : 240
	Peak (25°C)	300 (2mins)
Other Parameter		
Recommend Depth of Discharge		90%
Dimension (W × H × D, mm)		600 × 750 × 200 (Without hanging board)
Weight Approximate (kg)		99
Master LED Indicator		LED (SOC : 20% ~ SOC100% and working state)
IP Rating of Enclosure		IP20
Operating Temperature		Charge : 1 ~ 53°C / Discharge : -20°C ~ 53°C
Recommend Operating Temperature		15°C ~ 35°C
Storage Temperature		0°C ~ 35°C
Humidity		5% ~ 95%
Altitude		≤3000m
Cycle Life		≥6000 (25°C±2°C, 0.5C / 1C, 90%DOD, 70%EOL)
Installation		Wall-Mounted, Floor-Mounted
Communication Port		CAN2.0, RS485
Warranty Period ^[3]		5 years / 10 years
Energy Throughput		16MWh (25°C, 0.5C / 1C, 70%EOL)
Certification		UN38.3, MSDS, CE, CB

[1] DC Usable Energy, test conditions : 90% DOD, 0.5C charge & discharge at 25°C. System usable energy may vary due to system configuration parameters.

[2] The current is affected by temperature and SOC.

[3] Conditions apply, refer to Deye Warranty Letter.



RW-F16

Residential ESS Solution

Wall-Mounted Battery (LV)



Model		RW-F16
Main Parameter		
Battery Chemistry		LiFePO ₄
Built-in Circuit Breaker		125A 2P, 60Vdc
Capacity (Ah) ^[1]		314
Scalability		Max. 32 pcs pack (Max.512kWh) in parallel
Nominal Voltage (V)		51.2
Operating Voltage (V)		44.8 ~ 57.6
Nominal Energy (kWh) ^[2]		16
Usable Energy (kWh@90%DOD)		14.4
Charge / Discharge Current (A) ^[2]	Max. Continuous	160 / 160
	Peak	300 / 300 (10 sec)
Other Parameter		
Recommend Depth of Discharge		90%
Dimension (W × H × D, mm)		480 × 830 × 230 (Without hanging board)
Weight Approximate (kg)		120
Master LED Indicator		LED (SOC and working state)
IP Rating of Enclosure		IP20
Operating Temperature		Charge : 0 ~ 55°C / Discharge : -20°C ~ 55°C
Recommend Operating Temperature		15°C ~ 35°C
Storage Temperature		0°C ~ 35°C
Relative Humidity		0.95
Altitude		≤2000m
Cycle Life		≥6000 (25°C±2°C, 0.5C / 0.5C, 90%DOD, 70%EOL)
Installation		Wall-Mounted, Floor-Mounted
Communication Port		CAN2.0, RS485
Warranty Period ^[3]		5 years
Energy Throughput ^[3]		52.5MWh (25°C, 0.5C / 0.5C, 70%EOL)
Certification		UN38.3, MSDS


[1] Test conditions : 25°C±2°C, at beginning of life, 0.5C charge & 0.5C discharge,100% DOD.

[2] The current is affected by temperature and SOC.


[3] Conditions apply, refer to Deye Warranty Letter.

Typical Application Scenarios

Product Expansion				
Battery backup time		RW-F10.6		
Inverter	1h	2h	3h	4h
SUN 12KW SG 04LP3	2 units	3 units	4 units	5 units
SUN 12KW SG 02LP1	2 units	3 units	4 units	5 units
SUN 12KW SG 05LP3	2 units	3 units	4 units	5 units
SUN 20KW SG 05LP3	2 units	4 units	6 units	8 units

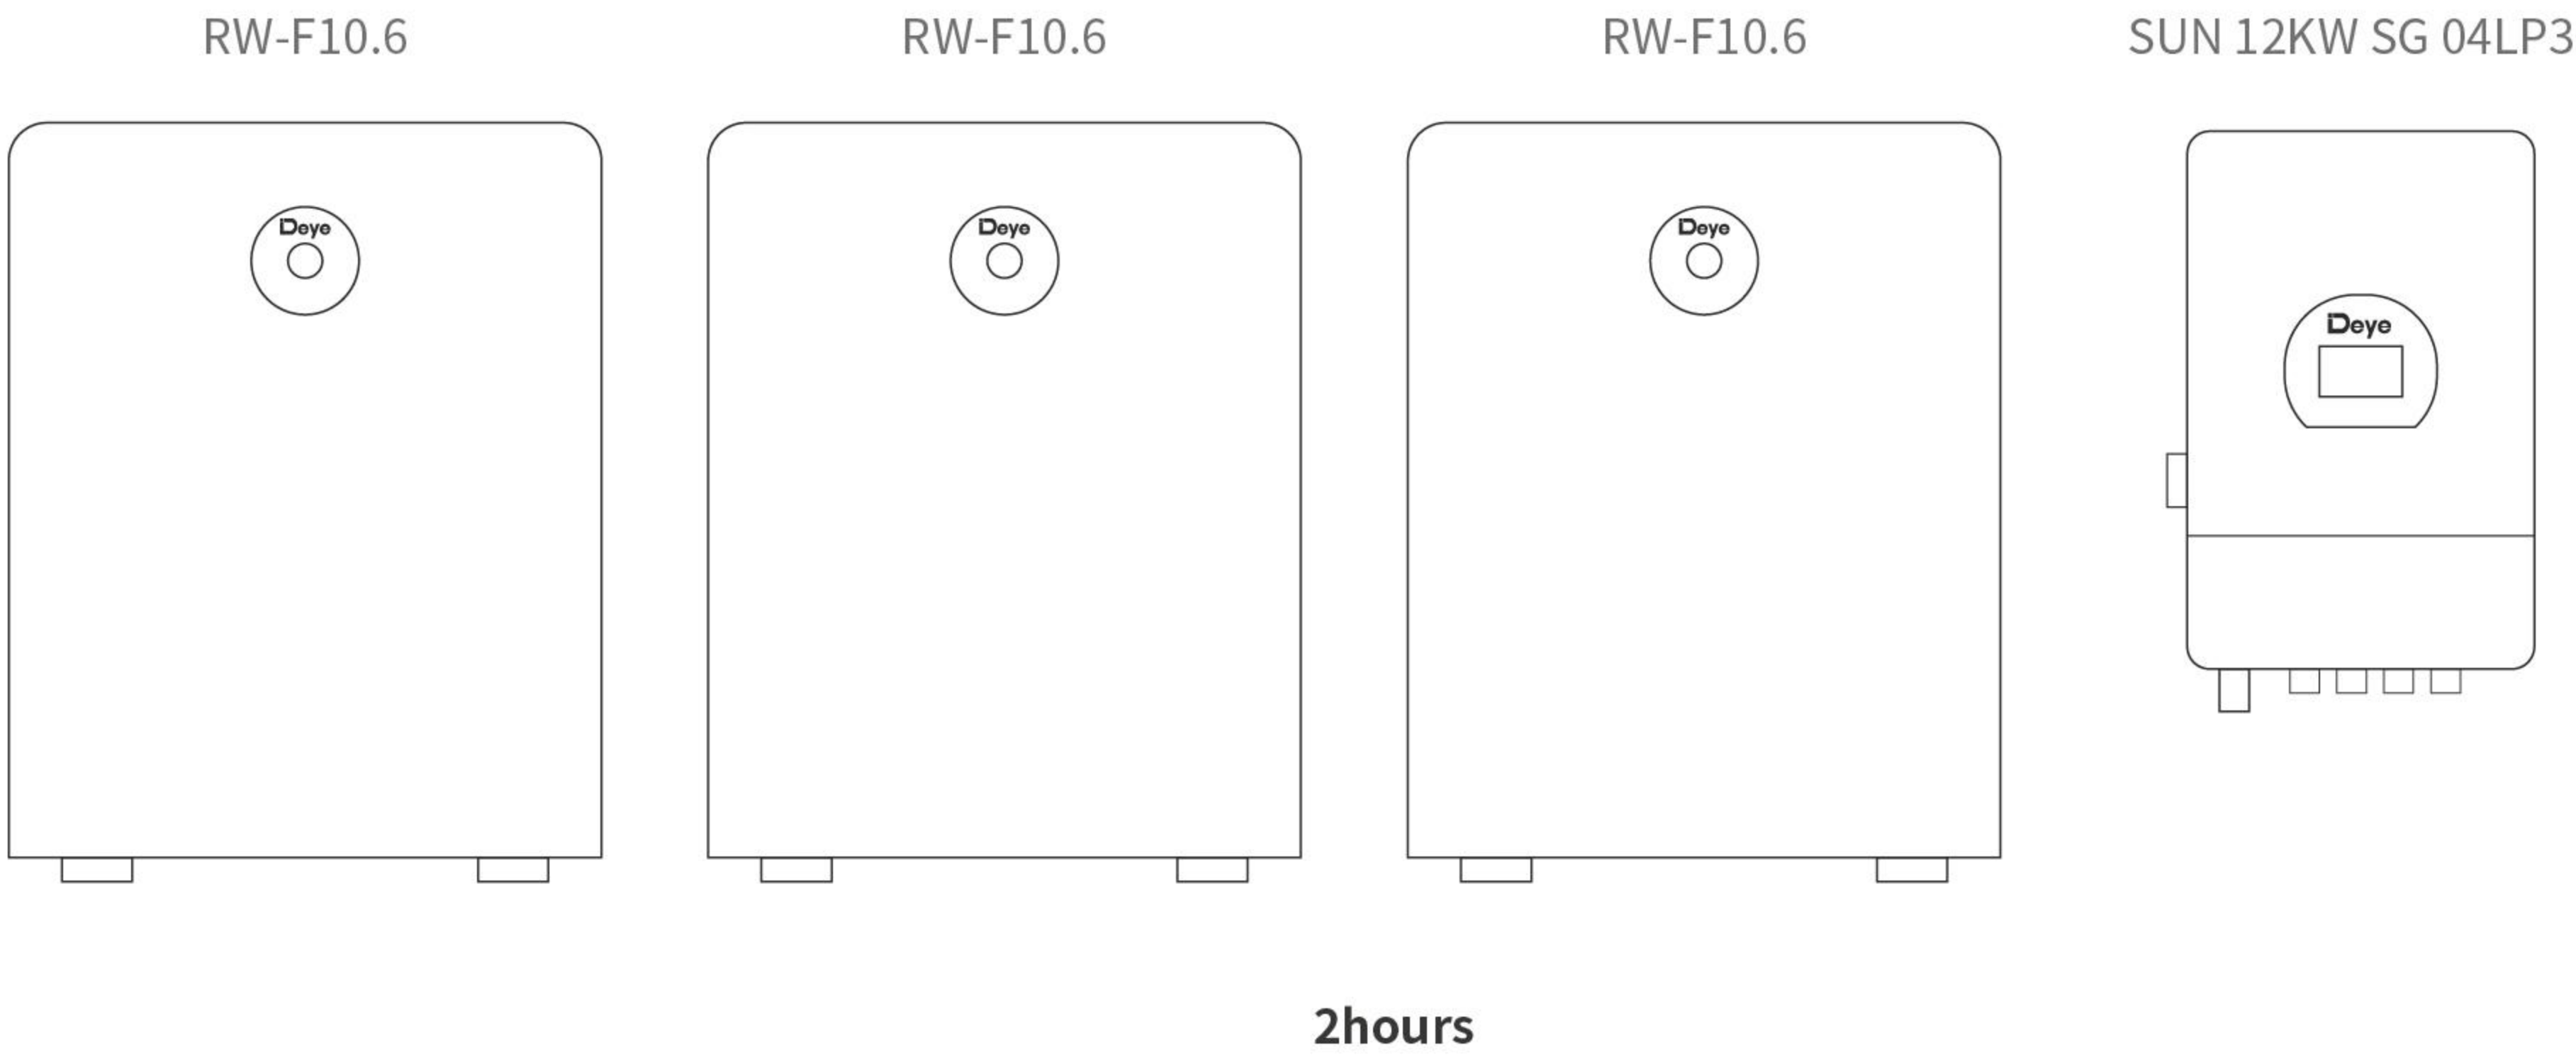

Battery backup time		RW-F16	
Inverter	2h	3h	4h
SUN 8KW SG 04LP3	1 units	-	3 units
SUN 8KW SG 02LP1	1 units	-	2 units
SUN 8KW SG 05LP3	1 units	-	2 units
SUN 16KW SG 05LP3	2 units	3 units	4 units

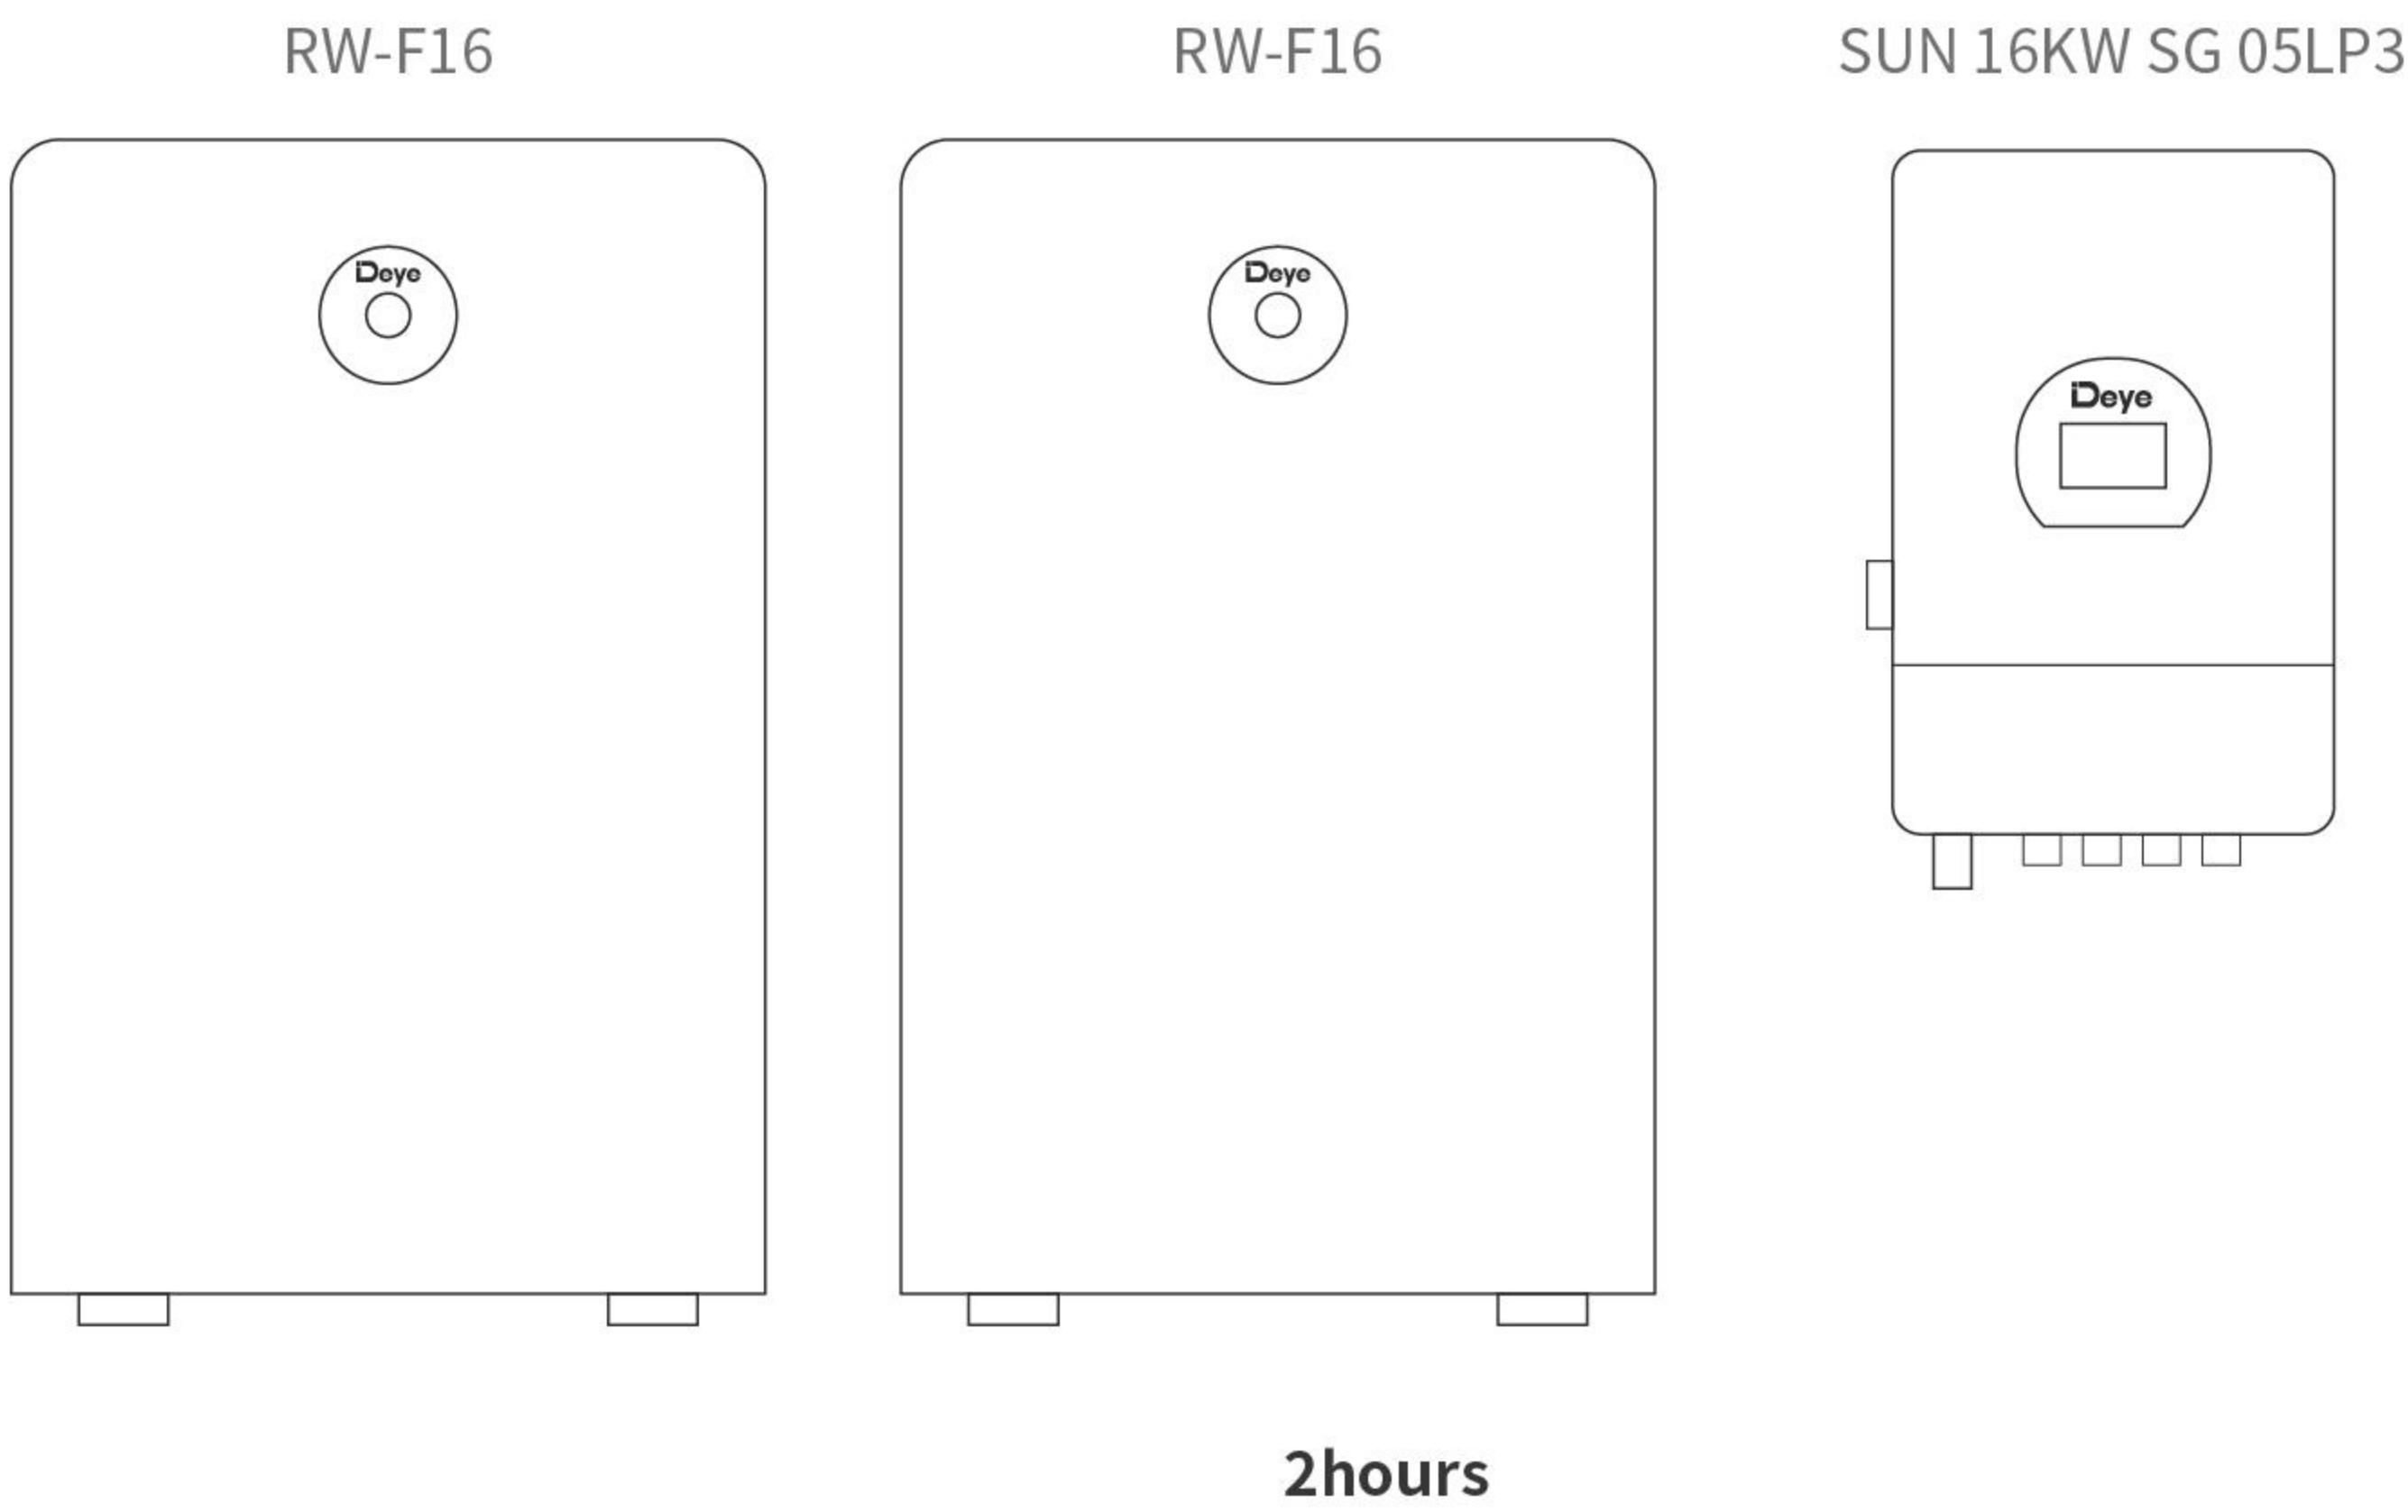



To Make ESS Better



Deye ESS Facebook



Deye ESS / Deye Inverter



www.deyeess.com / www.deyeinverter.com